

# Compact CC LED/Sensor Driver

DOM-D-CC-2 | 2-Channel | 50W | Domatic Bus | Auxiliary I/O



The Compact CC LED/Sensor Driver is an ultra-compact, 2-channel constant-current LED driver built for space-constrained architectural lighting installations. At just 86 × 37 × 22 mm it delivers up to 50W of precisely controlled output with industry-leading 0.7 W/cm<sup>3</sup> power density. Output current and logarithmic dimming are software-configurable via the Domatic PowerHub. An integrated auxiliary subsystem (3.3V output, 1× 0–10V analog input, 3× GPIO) supports sensor integration and fixture-level intelligence.

## Key Features

- ✓ 50W rated output power with 2 independent constant-current channels
- ✓ Ultra-compact form factor: 86 × 37 × 22 mm — industry-leading 0.7 W/cm<sup>3</sup> power density
- ✓ 56,000-step effective dimming resolution (PWM × CCR combined)
- ✓ Smooth logarithmic dimming to 0.1% brightness
- ✓ Software-configurable output current via the Domatic PowerHub
- ✓ Native Domatic Bus interface: power and data on a single 2-wire CL2 cable, up to 50 m
- ✓ Tunable white support (warm/cool channel control)
- ✓ Integrated auxiliary: 3.3V output + 3× GPIO + 0–10V analog input
- ✓ Real-time temperature and power monitoring reported to the PowerHub
- ✓ NEC Class 2
- ✓ Wet-rated for indoor and outdoor installations

## Electrical Specifications

### Input

Input Voltage	39 – 59 VDC
Nominal Input Voltage	48 VDC
Max Input Current	1.5 A
Max Input Power	60 W
Communication	Domatic Bus (IEEE 1901 HD-PLC)

### Output

Output Type	Constant Current
Output Channels	2
Channel Topology	Common Anode / Common Cathode / Independent
Output Voltage Range	12 to ( $V_{IN} - 2$ ) VDC
Current per Channel	0.1 – 0.7 A
Max Total Current	1.4 A
Max Output Power	50 W
Steady-State Ripple	≤ 4 – 10% at max load
Efficiency	94% at max load

## Dimming Performance

PWM Switching Frequency	~3 kHz
PWM Resolution	7,000 steps
Constant Current Reduction (CCR)	8:1 range
Effective Dimming Resolution	56,000 steps (PWM × CCR)
Min Brightness	0.1%
Dimming Curve	Logarithmic (configurable via the PowerHub)
Tunable White	Supported (2-channel warm/cool)
Fade Time	Configurable per circuit via the PowerHub
Soft-on / Fade-to-Black	Yes
Color Control	8-bit ratio

## Communication & Control

Network Protocol	IEEE 1901 HD-PLC, Domatic Device Protocol
Wiring	2-wire CL2 cable (power + data combined)
Max Distance from PowerHub	25 m on 18 AWG · 50 m on 16 AWG
Controller	Domatic PowerHub (required)
Monitoring	Temperature and power usage reported to the PowerHub in real time
Configuration	Output current, dimming curve, fade time, min/max limits — all software-configurable via the PowerHub

## Auxiliary I/O

The DOM-D-CC-2 includes an integrated auxiliary subsystem for sensor integration and fixture-level control, enabling smart lighting applications beyond simple dimming.

Pin	Function	Specification
3V3	3.3V Output Voltage	Max 3.3 VDC, 165 mW / 50 mA
GPIO1 – GPIO3	General Purpose I/O	Logic level, max 3.3 VDC, 26 mW / 8 mA

Pin	Function	Specification
AIN	Analog Input	0 - 10 VDC (12 VDC abs max), 30.2 kΩ impedance, 5 mW / 0.4 mA

## Protection Features


Overvoltage Protection	Yes
Overload Protection	Yes
Output Short-Circuit Protection	Yes
Over Temperature Protection	Yes
ESD Protection	Yes

## Environmental Specifications

Operating Ambient Temp ( $T_a$ )	0 to 55 °C
Full Power Rating	50 W up to 45 °C $T_a$
Derated Power	30 W at 55 °C $T_a$
Max Case Temp ( $T_c$ )	~75 °C

**Note** Derating chart is based on unloaded external I/O. Loading external I/O will impact derating by ~2 °C.


## Power Derating

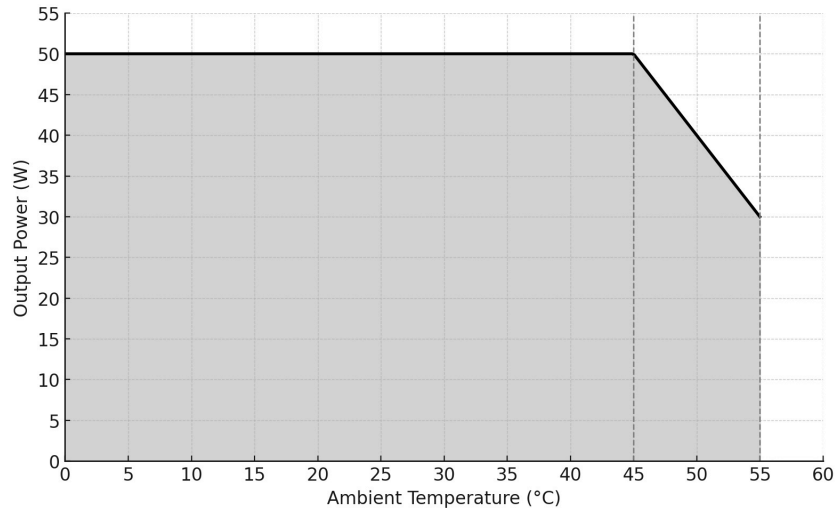

## Load Compatibility


Parameter	Single Channel	Both Channels (Total)
Output Current Range	0.1 - 0.7 A	0.1 - 1.4 A

Parameter	Single Channel	Both Channels (Total)
Output Voltage Range	12 to (V <sub>IN</sub> - 2) VDC	12 to (V <sub>IN</sub> - 2) VDC
Max Power (at ≤ 45 °C T <sub>a</sub> )	32 W	50 W
Max Power (at 55 °C T <sub>a</sub> )	30 W	30 W

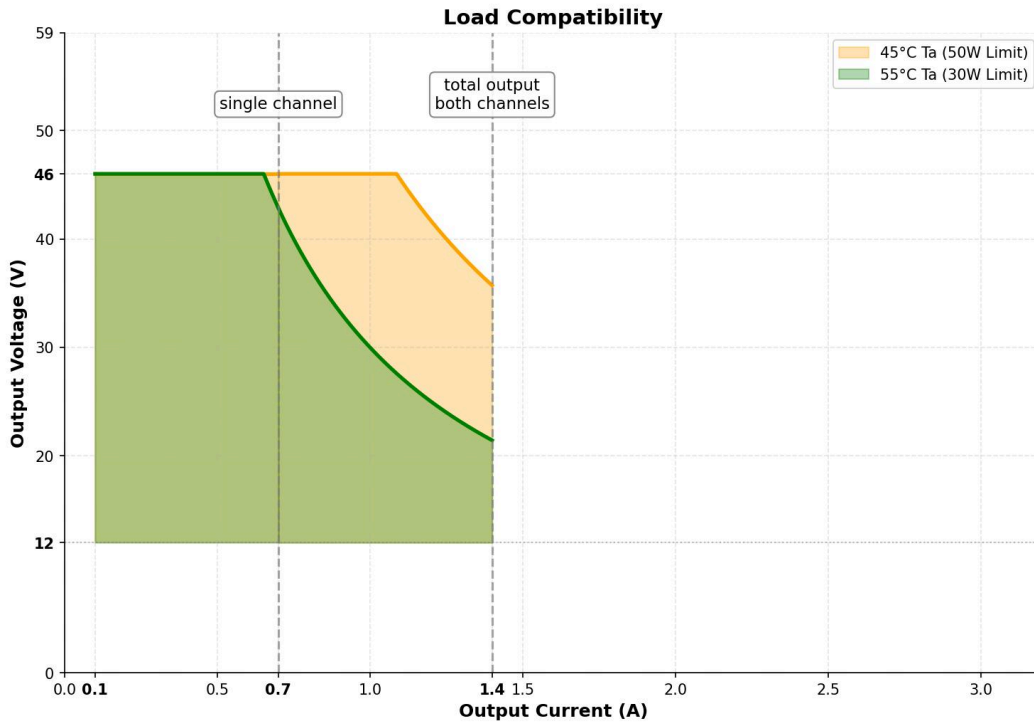

## Mechanical Specifications

Length	86 mm (3.39")
Width	37 mm (1.46")
Height	22 mm (0.87")
Volume	70 cm <sup>3</sup>
Power Density	0.7 W/cm <sup>3</sup> (at 45 °C)
Enclosure Material	Sheet metal, 1 mm thickness

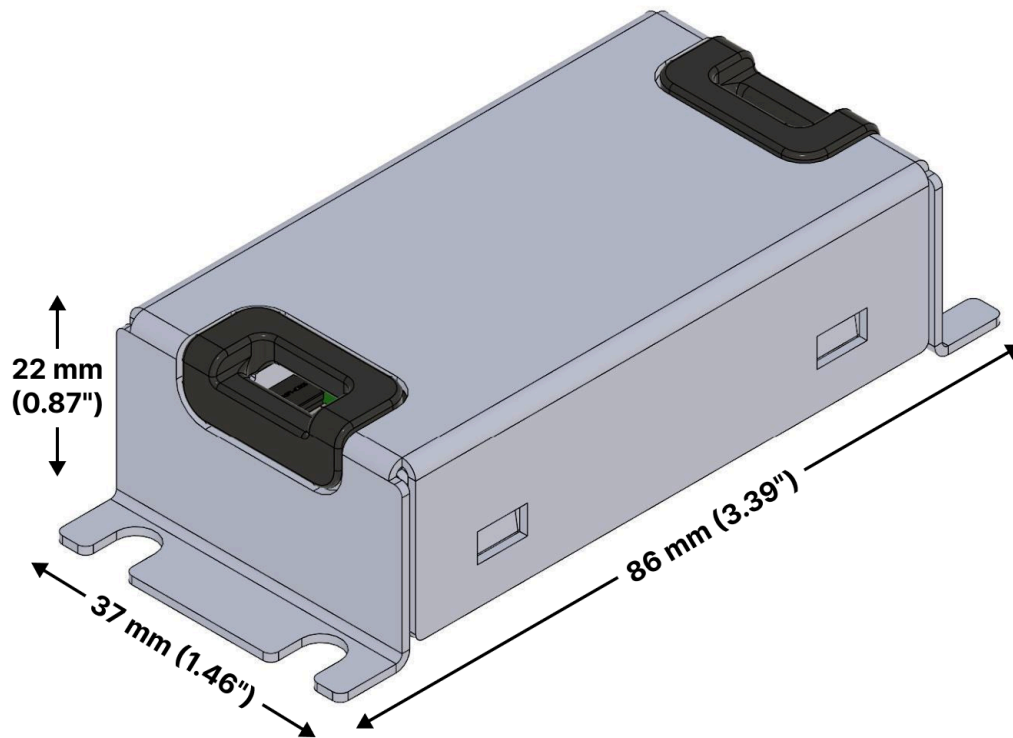












## Wiring & Connectors

To achieve wet rating, all I/O is exposed as pigtail wires. The tables below describe each signal wire on the device.

### Input Connector

Wire	Function	Wire Spec	Description
<span style="color: red;">■</span> Red	VIN	18 AWG UL1007	Positive power/data input
<span style="color: black;">■</span> Black	GND	18 AWG UL1007	DC negative return (0V reference, not earth ground)

## Output Connector

Wire Color	Pin Name	Wire Spec	Specification
 Red	AN0 (Anode Ch0, Common / Warm)	18 AWG UL1007	Max 57 VDC or $V_{IN} - 2 V$ , 50 W / 0.7 A
 Yellow	CA0 (Cathode Ch0, Warm)	18 AWG UL1007	Max 57 VDC or $V_{IN} - 2 V$ , 50 W / 0.7 A
 White	CA1 (Cathode Ch1, Cool)	18 AWG UL1007	Max 57 VDC or $V_{IN} - 2 V$ , 50 W / 0.7 A
 Red/White or  Purple	AN1 (Anode Ch1, Cool)	18 AWG UL1007	Max 57 VDC or $V_{IN} - 2 V$ , 50 W / 0.7 A
 Black	GND	24 AWG UL1007	DC negative return (0V reference)
 Grey	GPIO3	24 AWG UL1007	Logic I/O, 3.3 V max
 Green	GPIO2	24 AWG UL1007	Logic I/O, 3.3 V max
 Brown	GPIO1	24 AWG UL1007	Logic I/O, 3.3 V max
 Blue	AIN (Analog Input)	24 AWG UL1007	0 – 10 VDC, 30.2 k $\Omega$
 Pink	3V3 (Aux Output)	24 AWG UL1007	3.3 VDC, 50 mA max

## Standards & Compliance

<b>Safety</b>	UL 8750, Second Edition (rev. January 05, 2021)
<b>Listing</b>	Eurofins / MET Listed – Low Voltage Fixture Driver; UL File E115463; MET Report NRTL117522
<b>Power Classification</b>	NEC Class 2
<b>Environment Rating</b>	Wet-rated

## System Requirements

The DOM-D-CC-2 requires a Domatic PowerHub as the bus controller. The PowerHub provides power (nominal 48 VDC, up to 100 W per port) and data connectivity over standard CL2 cable. Typical installations support a maximum cable distance of 50 m on 16 AWG; on 18 AWG the maximum distance is 25 m. Longer runs can be supported with thicker cabling.

## Ordering Information

Model Number	Description
DOM-D-CC-2	2-Channel Constant-Current LED Driver, 50 W, Domatic Bus, with Auxiliary I/O